



LOSPA SB

slotted flooring for beef fattening


Thickness: 15/16"

**Dimensions:
customized to fit your slats**

- **Curved surface with approximately 5% slope towards slats**
 - facilitates drainage
 - improves hygiene
- **Improves slip-resistance**
 - reduces the risk of injury and animal losses
- **Enhances weight gain and shortens fattening period**



optimized fastening system

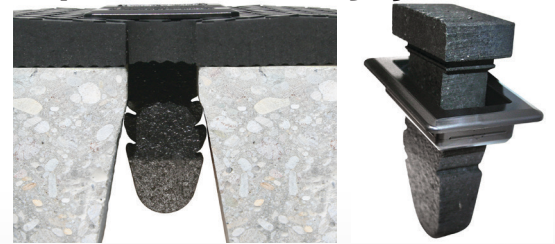

reinforced curved surface

grooved underside

Requirement:
Slat width must be at least 1-3/16" (30 mm)
All slats must be the same width

Tolerances:
Thickness: +3/-2 mm
Length + Width: +/- 1.5% (DIN ISO 3302-1 tolerance class M4)
The tolerances also apply within the mat and when installed.

Revision: 0210



Agromatic^{INC}
(800) 800-5824 agromatic.net