

KURA

The Gold Standard



1" Thick


3x more traction than 3/4" flooring

Several size options



CIRRUS


Budget Meets Comfort



3/4" Thick

Ideal softness

Designed for use with scrapers



pediKURA


Abrasion Zones



1" Thick

Cover 20% of rubber surfaces

Available as pediCIRRUS



North American Distributor:



(800) 800-5824 · agromatic.net


More technical details on request. The products presented here should only be used for the mentioned applications. Technical specifications are subject to alterations. All sales are subject to our General Terms and Conditions. Please take notice of the corresponding KRAIBURG specifications, tolerances and installation instructions with useful advice and tips. You will obtain these at agromatic.net.

RIMA & profiDRAIN Drainage Channels RIMA

RIMA - 1" Thick

Curved surface with 4% slope for drainage






profiDRAIN - 1-1/4" Thick

Curved surface with 6% slope and optiGrip surface





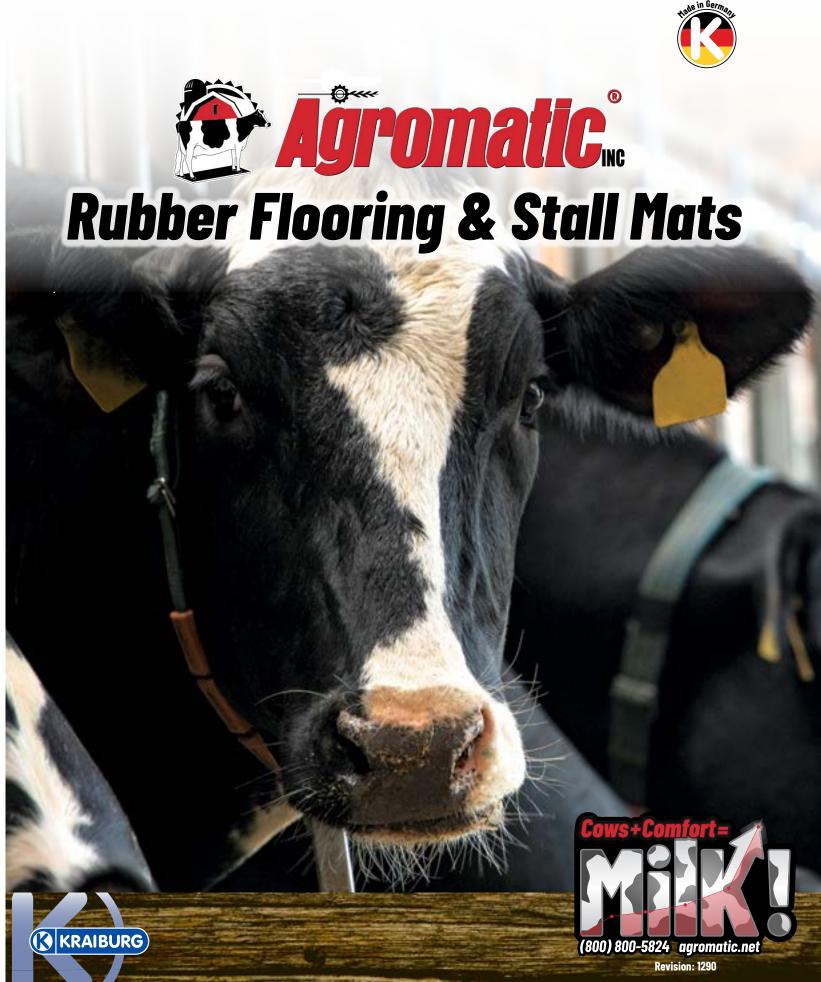

KRAIBURG Specialty Flooring Options



PASEO UtilityFlooring



1-1/4" Thick

Parlor pit flooring



MONTA

For Inclined Areas



1" Thick

Ribbed profile improves footing on steep slopes



LOMAX

Perforated Flooring





1" Thick

Soil stabilization





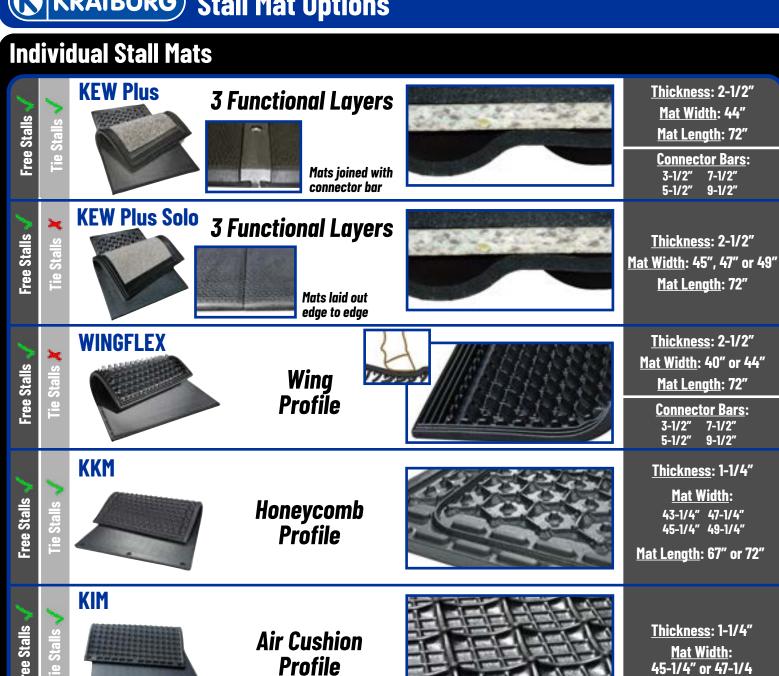

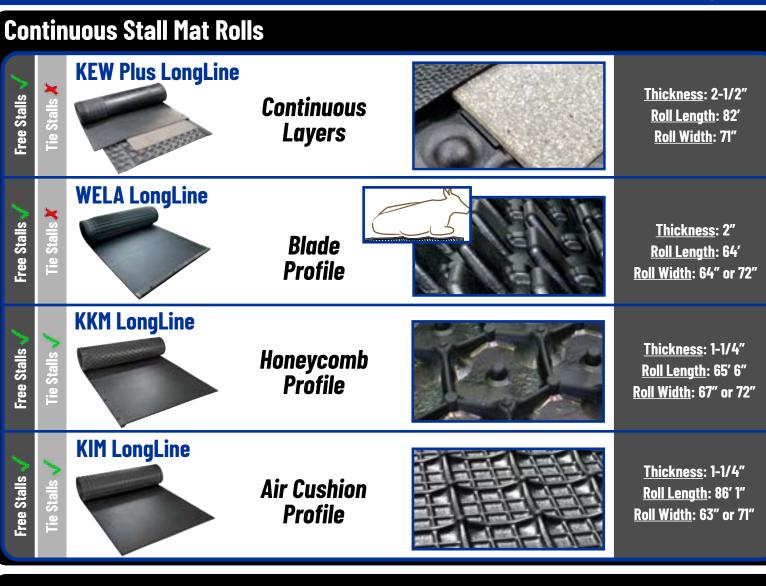





Calving Pens/Box Stalls



Air Cushion Profile



Thickness: 1-1/4" Mat Width: 45-1/4" Mat Length: 67"

Additional mat sizes are available by special order. Contact Agromatic Inc. for pricing and lead times.

Tolerances for KRAIBURG Mats:

thickness: +3/-2 mm (+0.12/-0.08") length + width: +/- 1.5 % (DIN ISO 3302-1 tolerance class M4) The tolerances also apply within the mat and when installed.

Deep Bedded System

CALMA



2 Functional Layers

Air Cushion

Profile



Thickness: 4" Mat Width: 43-1/4" Mat Length: 35-7/8"

Mat Length: 67"

Thickness: 1-1/4"

Mat Width: 45-1/4"

Mat Length: 67"